


### ■ Features :

- Suitable for New Creative Products
- High Power
- High Performance
- Superior Thermal Stability

### ■ Typical Applications :

- Night Vision
- Camera
- Outdoor/Indoor applications

### ■ Outline Dimensions : (Unit: $\mu\text{m}$ )

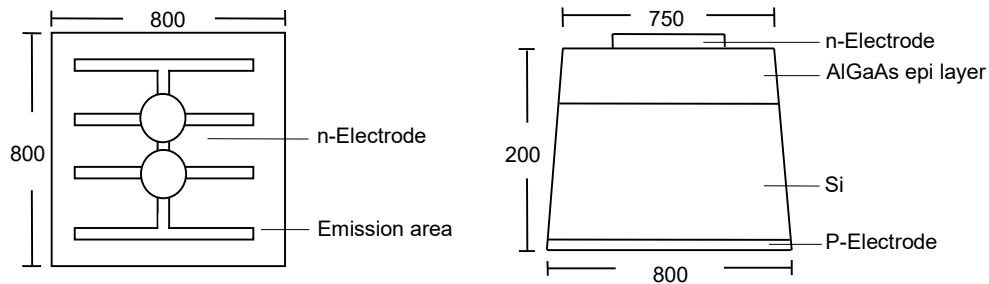

### ■ Physical Structure :

LED Chip dimension	Chip size	800±25 $\mu\text{m}$ x 800±25 $\mu\text{m}$
	Thickness	200 ± 25 $\mu\text{m}$
	Emission area	750±25 $\mu\text{m}$
	Bonding pad	130±10 $\mu\text{m}$
Electrode	Top: N (cathode)	Gold
	Backside: P (anode)	Gold

\*C

### ■ Electro-Optical Characteristics : ( $T_a = 25^\circ\text{C}$ )

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	$V_{FH}$	$I_F = 350 \text{ mA}$	1.30	-	1.60	V
Reverse Current	$I_R$	$V_R = 10\text{V}$	-	-	1	$\mu\text{A}$
Radiant Power	$P_o$	$I_F = 350 \text{ mA}$	80	-	110	mW
Wavelength	$\lambda_P$	$I_F = 350 \text{ mA}$	970	-	980	Nm
Spectral width at half height	$\Delta\lambda$	$I_F = 350 \text{ mA}$	-	35	-	Nm